


Spezifikation der Maxi 4 PSU:



Technische Daten Maxi 4 PSU	060905 / RCC125E/U
Höhe	293 mm / 11.5"
Breite	82 mm / 3.25"
Tiefe	250 mm / 9.9"
Gewicht	3.3 kg / 7.3 lbs
Ausgangsbuchse (zu Farbwechslern)	XLR - 4 pin - F
Returnbuchse (von Farbwechslern)	XLR - 4 pin - M
DMX Eingang	XLR - 5 pin - M
DMX Ausgangsbuchse	XLR - 5 pin - F
Galvanisch getrennter DMX Eingang	Ja
Schaltbarer Abschlußwiderstand (DMX)	Ja
Betriebsspannungsanschluß	IEC (CEE 22)
Betriebsspannung:	85 - 264 Volt AC
Sicherung, Ø6.3x32 mm, träge	4 Ampere
Max. Anzahl der anschließbaren Farbwechsler	24 x 6", 8", 12" PRO2 oder 12 x 15", 8-Lite PRO2
Maximale Anzahl der Farbwechsler pro Ausgang	12 x 6", 8", 12" PRO2 oder 6 x 15", 8-Lite PRO2
CE Zertifikat	EMC, LVD

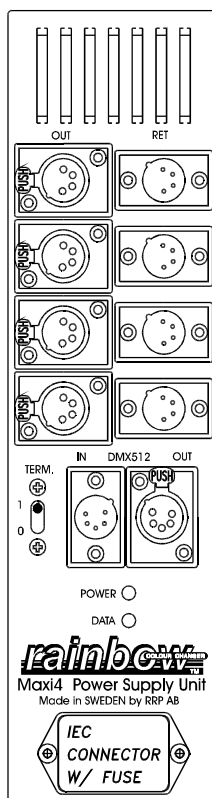

Worldwide Distribution:
Premier Lighting Products International GmbH
An der Talle 26-28
D-33102 Paderborn
Germany

Tel.: +49 (0) 52 51/14 092-28
Fax: +49 (0) 52 51/14 092-90

www.plp-international.com
sales@plp-international.com

©2007 Rainbow Colour Changers GmbH
Rainbow is a registered trademark of
Rainbow Colour Changers GmbH

This manual is valid from the 1st of July 2007. All previous manuals are herewith not valid any longer.

All technical specifications are subject to change without notification.

German Distribution:
Lightpower GmbH
An der Talle 26-28
D-33102 Paderborn
Germany

Tel.: +49 (0) 52 51/14 32-0
Fax: +49 (0) 52 51/14 32-80

www.lightpower.de
info@lightpower.de